


## Roof Rack

The cross bars (5) should only be used as guard rails to prevent luggage from sliding. They must only be installed above the protective strips (1).

Installation:

1. Loosen knurled-head screws (2) and turn clamping plates (3) in direction of larger arrow.
2. Place cross bar mounts on roof railings from below. The arrows (4) must point towards the front of the vehicle.
3. Adjust length (arrow) of the cross bars (5).

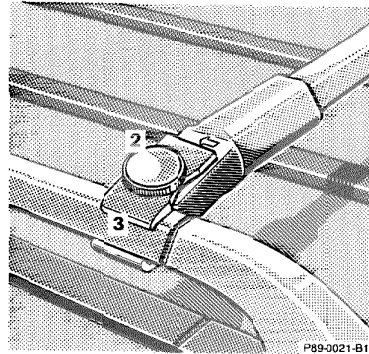

4. Turn clamping plates back (3) over roof railings and tighten the knurled-head screws (2).

### Important!

Do not use the pop-up feature of the sliding roof when positioning and/or placing luggage above it, to prevent damage to the sliding roof panel.

Never place luggage on cross bars only, but load it on the protective strips. When carrying luggage on the strips, distribute it evenly over the entire area and fasten it securely.

Long cargo items should not extend beyond the vehicle length and should be securely fastened at the front and rear.

Prior to and during an extended trip check the roof load, and retighten the knurled-head screws if necessary.

The heaviest portion of the cargo should always be kept as low as possible since it influences the handling characteristics of the vehicle.

When driving without roof luggage, the cross bars may be removed to reduce wind noise.

For load capacity see *Technical Data* in Index.

### Note:

Use only roof racks approved by Mercedes-Benz. They mount to the roof railings and do not require additional supports (e.g. suction cups or legs). Such supports may lead to marring of the paint or denting of the roof. For further information inquire at your Mercedes-Benz dealer.

