

P97-0050-B13

Loading Instructions

The handling characteristics of a fully loaded vehicle depend greatly on the load distribution. It is therefore recommended to load the vehicle according to the illustrations shown, with the heaviest items being placed towards the front of the vehicle.

The total load weight including vehicle occupants and luggage/ cargo should not exceed the vehicle capacity weight indicated on the certification tag which can be found on the left door pillar.

Always place items being carried against front or rear seat back-

rests, and fasten them as securely as possible.

The heaviest portion of the cargo should always be kept as low as possible since it influences the handling characteristics of the vehicle.


Warning!

Always fasten items being carried as securely as possible.

In an accident, during hard braking or sudden maneuvers, loose items will be thrown around inside the vehicle, and can cause injury to vehicle occupants unless the items are securely fastened in the vehicle.

To help avoid personal injury during a collision or sudden maneuver, always use partition net when transporting cargo.

Never drive vehicle with trunk lid open. Deadly carbon monoxide (CO) gases may enter vehicle interior resulting in unconsciousness and death.

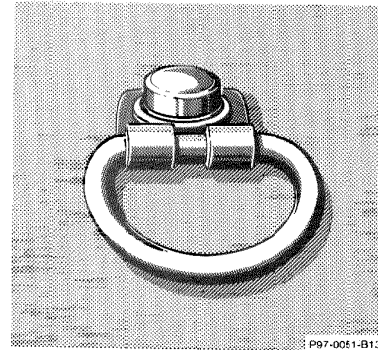

P97-0051-B13

Cargo Tie-Down Eyelets

Secure cargo by applying even load on all four eyelets.

Four eyelets are located in the cargo compartment. Additional two eyelets can be found at the front seat belt mounts.