



Removal

- 1 Remove cover in wheel house rear at left and right.

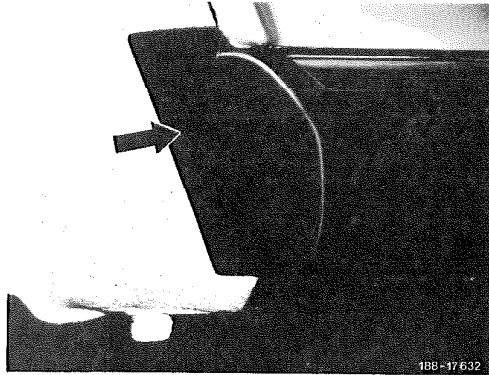

- 2 Unscrew fastening nuts in trunk at left and right.
- 3 Pull out bumper toward the rear.

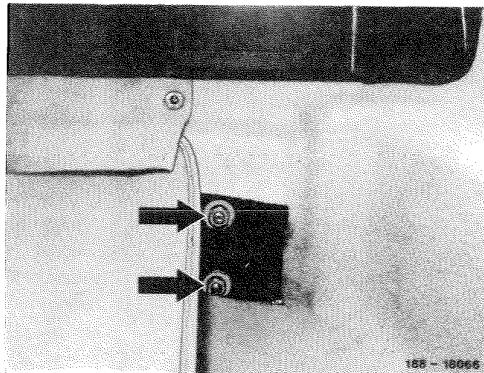

Installation

- 4 Introduce bumper at rear vent and push forward.
- 5 For further installation proceed vice versa.

Note: On vehicles with SA-trailer coupling, refinish bumper. Scope of job is described in file Special equipment Group 31.

