


## 88-402 R and R trim strips on radiator grille

---

### A. Removal of undamaged trimstrips

1 Remove radiator grille (88-401).

2 Pull horizontal trimstrips in outward direction, pull out vertical trimstrips in downward direction.

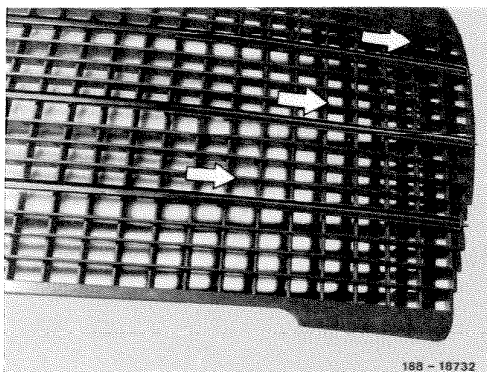

### Installation

---

3 For installation proceed vice versa.

### B. Removal of damaged trimstrips


1 Push damaged trimstrip from lugs with plastic wedge or the like and pull out from under radiator cowling.



## 88-402 R and R trim strips on radiator grille

---

- 2 Cut off holding lugs.

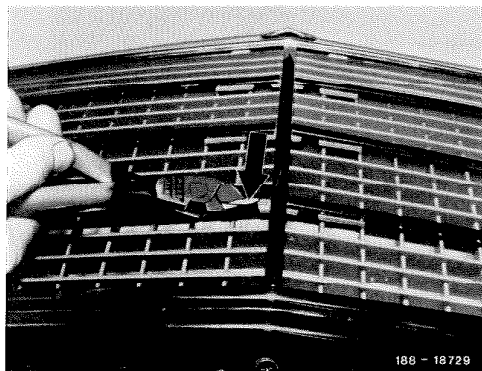

### Installation

---

- 3 Slip plastic clips into new trimstrip.
- 4 Slip trimstrip in-between radiator grille and radiator cowl and push-in holding clips.

**Note:** Slightly grease clips prior to insertion.

- 5 Renew vertical trimstrip likewise.

