



Removal

- 1 Press off operating lever button.

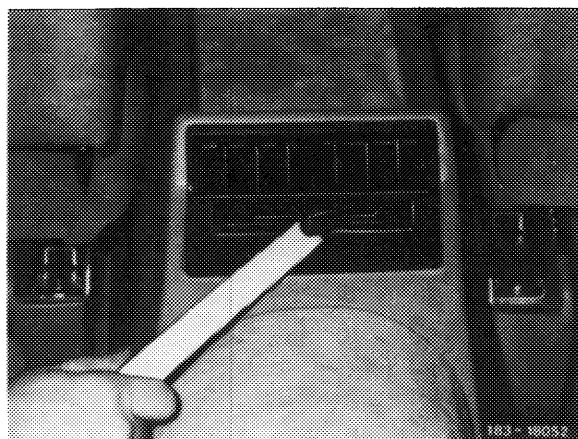

- 2 Unclip frame on bottom left and right and remove from center console.

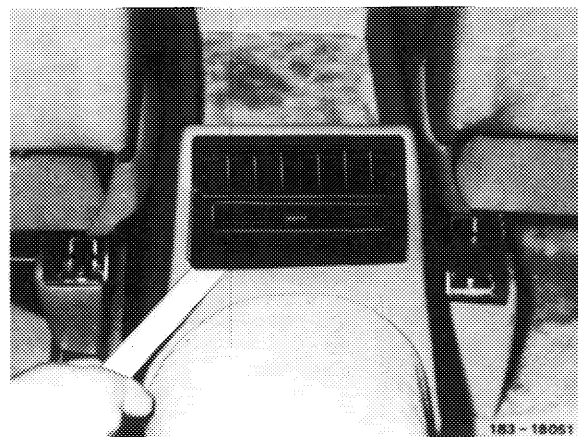

- 3 Press in retaining clamps on left and right and remove Venetian blinds to the rear.

Installation

- 4 The parts are installed in the reverse sequence.

