


On models 107 and 126 with 8-cylinder engine a new control unit with coding plug will be installed starting approx. 1/87. The 6-cylinder models will be phased in.


After using up spare parts stocks, only the new control unit and the respective coding plug will be available.

The new control unit with coding plug has no influence on cable lines and thereby also on wiring diagrams. Installation can proceed without changing harness.

N4 Control unit cruise control/Tempomat without coding plug

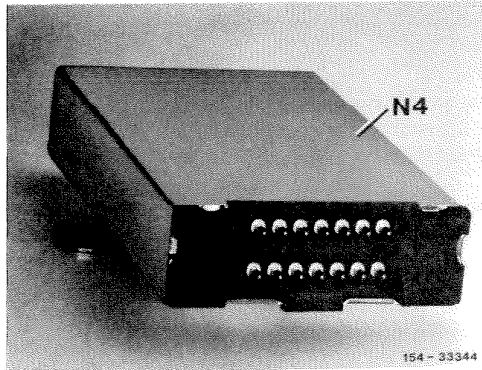

N4/2 Control unit, cruise control/Tempomat  
R 29 Coding plug, cruise control/Tempomat

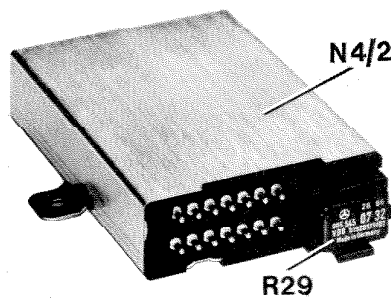

## 54-565 R and R control module


---

### Removal


---

- 1 Remove cover under instrument panel on driver's side.
- 2 Pull plug from control unit (2).
- 3 Unscrew control unit (2) with holder on pedal bearing bracket.
- 4 Unscrew control unit (2) from holder. On 2nd version of model 126, remove clips and take off control unit.
- 5 On control units with coding plug, pull off coding plug.

Model 107

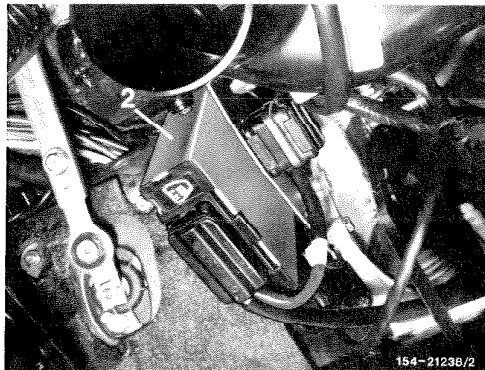

Models 123, 126

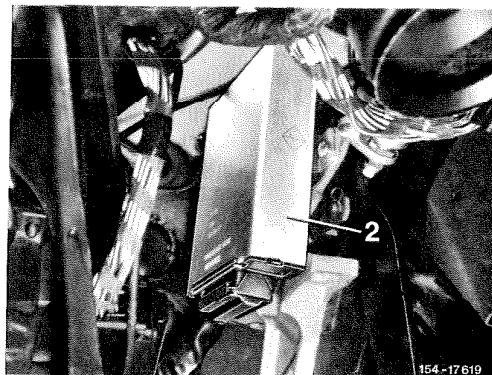

### Installation

---

- 6 For installation proceed vice-versa.
- 7 Check adjustment of connecting rod (21) and re-adjust, if required (54-561).
- 8 Perform function test on road.