


## 68-485 R and R rear center trunk panel

---


### Removal

---

1 Turn fastening bolts for lamp carrier to the left, remove lamp carrier left and right and put aside in trunk.

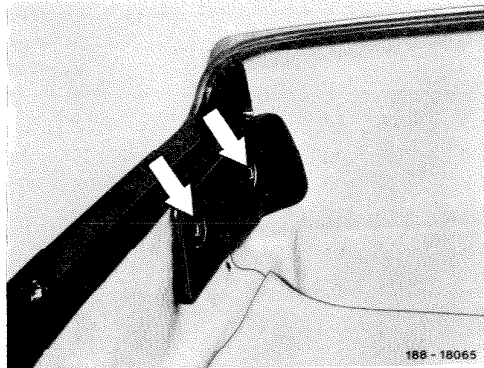

2 Push out clip on rear center section left and right.

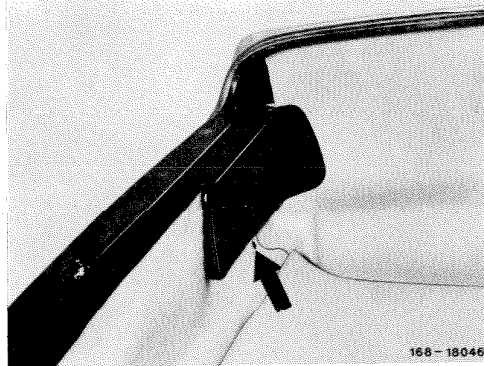

3 Unclip cover on rear center section front, move out to the rear and remove cover with needle felt lining.

### Installation

---

4 For installation proceed vice versa.

