


88-805 R and R door belt line seal molding

Removal


1 Remove outside rear view mirror on driver's door left or right (88-900 or 88-905).

2 Push off cover plate inside at righthand driver's door and pull-out in upward direction.


Shown on a vehicle with righthand outside rear view mirror

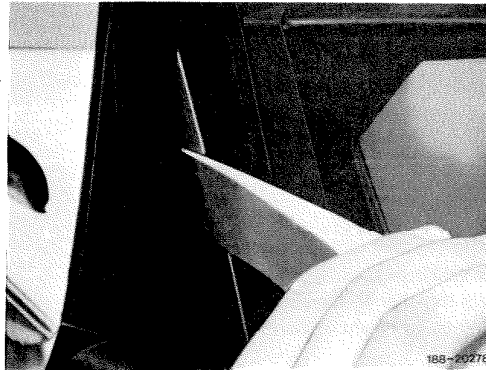

3 Unscrew screws and remove outside cover plate.

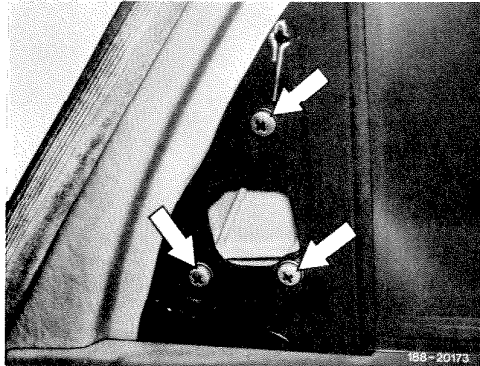


4 Beginning from the rear, push trimstrip together with sealing outside in range of crank window in upward direction out of spot weld flange by means of a plastic wedge.

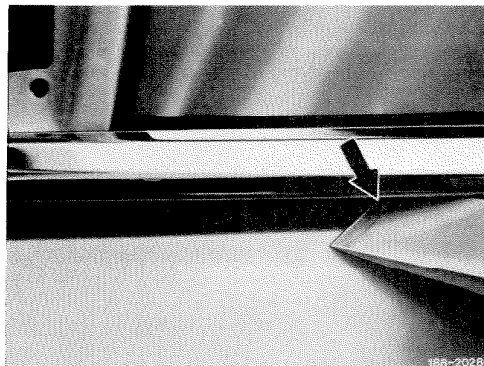

88-805 R and R door belt line seal molding

5 Push trimstrip at front end of driver's door or at rear end of rear compartment door out of clip by means of plastic wedge and remove trimstrip together with sealing strip.

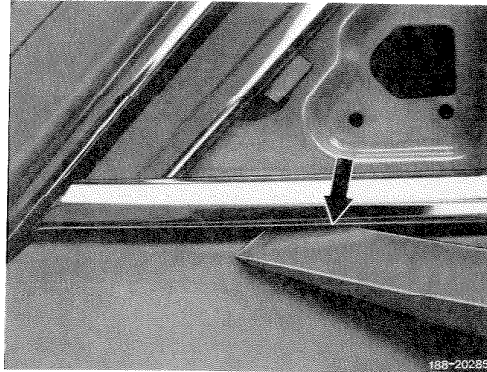

Installation

6 Position trimstrip together with sealing strip and align. Place plastic wedge or the like on sealing strip and fasten trimstrip together with sealing strip in range of crank window by means of hammer blows against plastic wedge.

7 Engage trimstrip in range of clip.

