


68-400 R and R upper windshield reveal molding

Removal

1 Pull-off inside mirror in downward direction.


2 Unscrew base plate for inside mirror.

3 Remove sun visor, center.

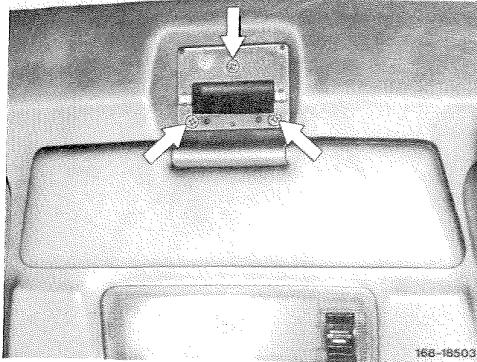


4 Push out dome light at recess by means of a screwdriver (1st version).

5 Pull-off electrical connections at dome light.

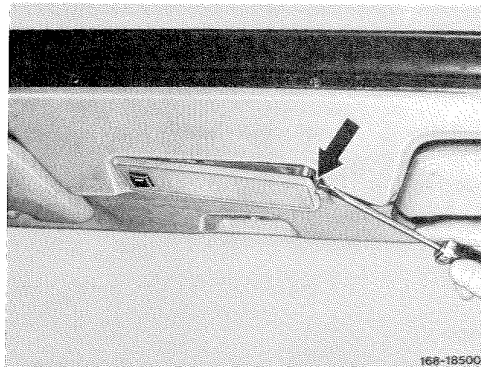


6 Force complete roof control unit to the right and push out of lining with plastic wedge (arrow). Pull off plug, remove roof control unit (2nd version).

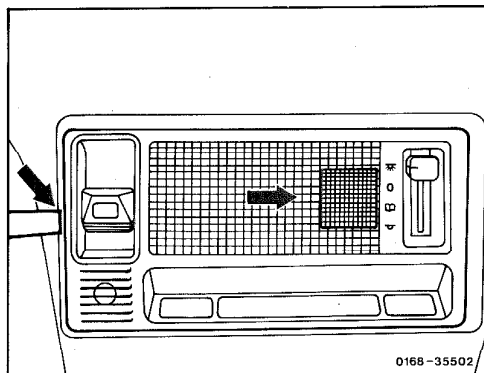


68-400 R and R upper windshield reveal molding

- 7 Unscrew sun vizer and counterbearing left and right.

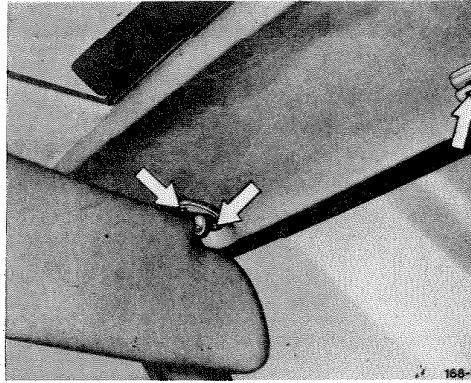


Note: On vehicles with sliding roof, unscrew chrome strip on sliding roof cutout.

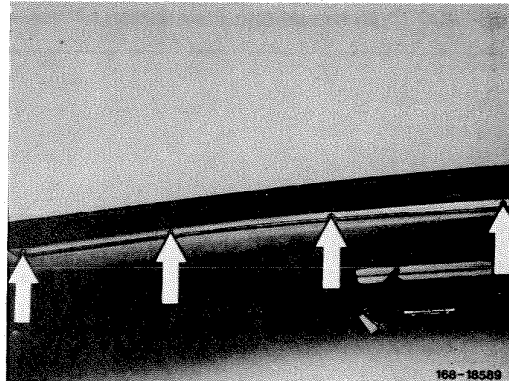

- 8 Pull-off chafing strip in range of reveal molding on windshield top and unclip reveal molding at left and right on roof frame.

- 9 Pull reveal molding in forward direction out of roof frame.

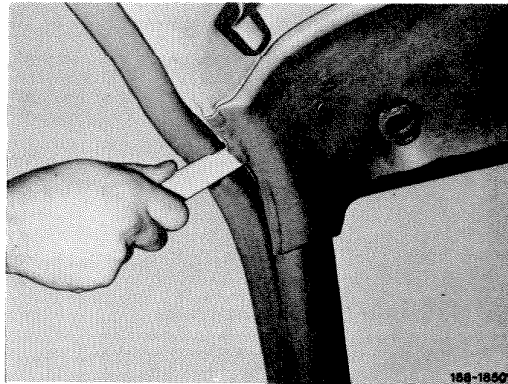

Installation

- 10 Slide reveal molding from the front toward the rear into roof frame and attach to lateral clips.

- 11 For further installation proceed vice versa.

