


A. Sedan

Removal


1 Remove rear seat cushion and rear seat backrest (91-170).

2 Unscrew screw below on paneling.


3 Push off chafing strip in range of rear pillar paneling.

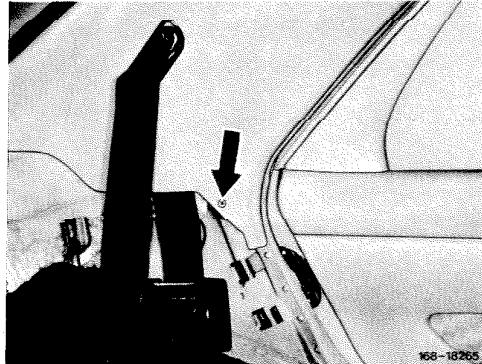

4 Unclip paneling in range of door cutout and pull out of rear pillar and roof frame paneling in forward direction.

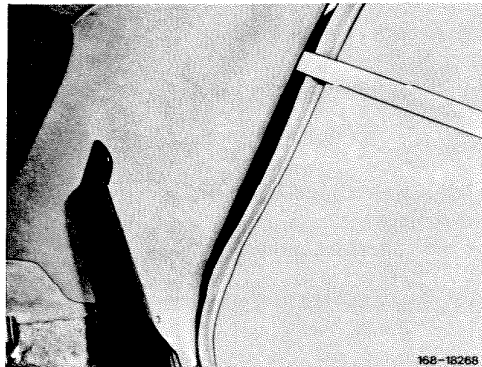


5 Unscrew safety belt on side member and pull through paneling.

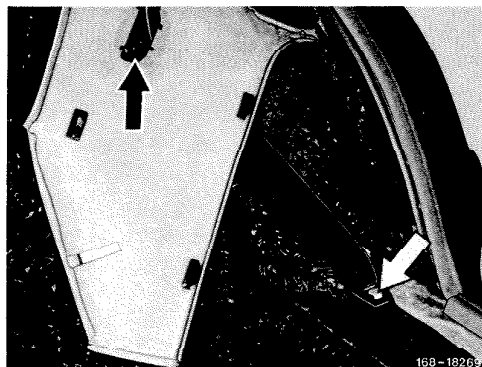


68-449 R and R C-pillar trim

Installation

6 Prior to installing paneling, make sure that the rear clip is in mount (large arrow). The two clips for front mounts (small arrows) should be in rear pillar.

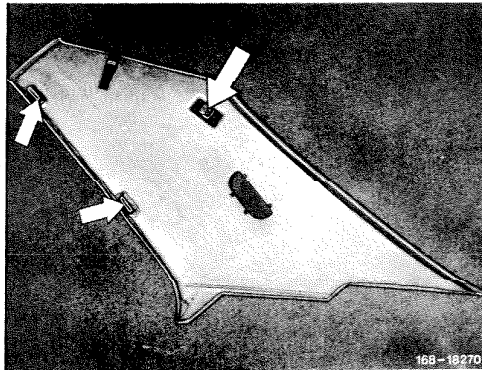


7 Insert safety belt through paneling and screw to side member.

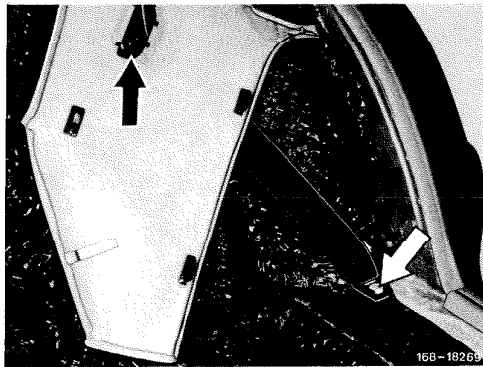

8 Introduce paneling first with rear clip into rear pillar, then turn paneling slightly in upper range and slip upper fastening hook under roof paneling.

9 Fasten paneling in range of door cutout with clips.


10 For further installation proceed vice versa.

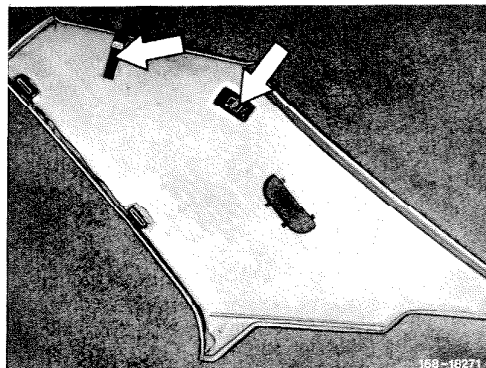


B. Coupe

Removal


- 1 Remove rear seat cushion and rear seat backrest (91-170).
- 2 Remove screw on lining, bottom.

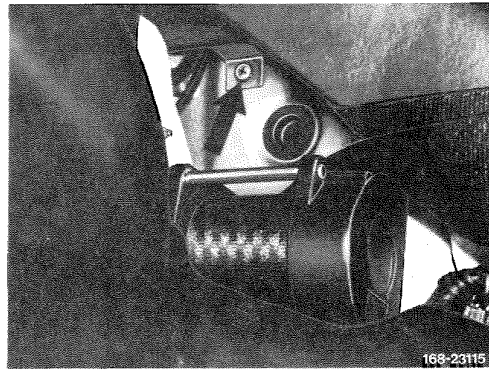

- 3 Unclip lining in range of door cutout and pull out in forward and upward direction.

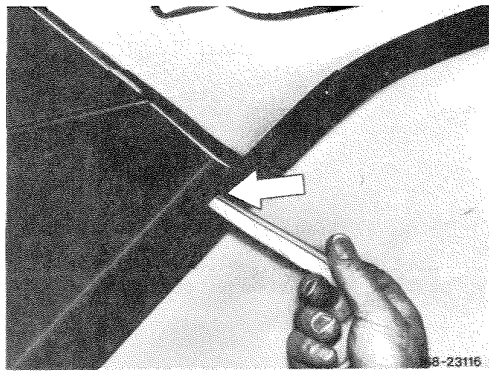

- 4 Unscrew safety belt on side member and pull through lining.

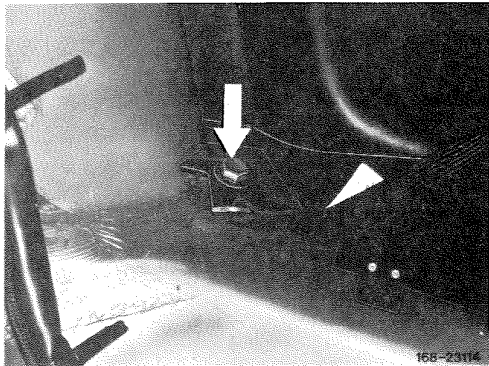

Installation

- 5 Push clips into mounts on lining.
- 6 For further installation proceed vice versa.

