


## 88-905 R and R electrically adjustable outside rear view mirror

---


### Removal

---

- 1 Unclip cover plate at top out of door frame and pull out of door paneling in upward direction.
- 2 Remove foam fabric shim.

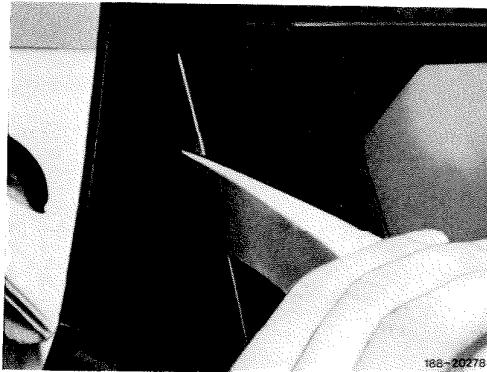

- 3 Unscrew fastening screw on plug connection for electric supply line and pull off plug.

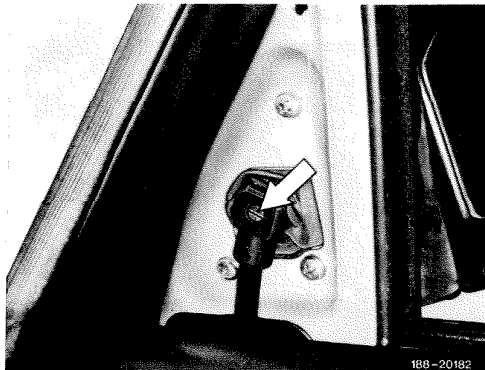

- 4 Unscrew fastening screws for outside rear view mirror and remove mirror.

### Installation

---

- 5 For installation proceed vice versa.

