

05—211 Checking and replacing hydraulic valve clearance compensating elements

Tightening torques

Bolts for cylinder head cover
Compensating element in cylinder head


Nm

3

60

Special tool

Spring compressor for valve spring




123 589 03 61 00

Note

Store compensating elements in upright position only and do not disassemble.

Reinstall rocker arms and compensating elements in the same place from which they were removed.

In the event of complaints about noise, check compensating elements as follows:

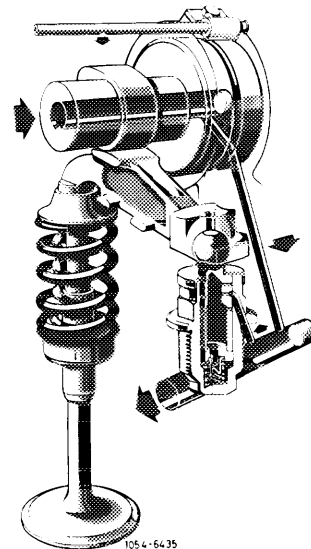


Checking

1 Place cam tip opposite rocker arm in upward position.


2 Push with handle of a hammer against rocker arm.

If the ball head pressure bolt drops too fast when compared with other pressure bolts, replace hydraulic valve clearance compensating element.

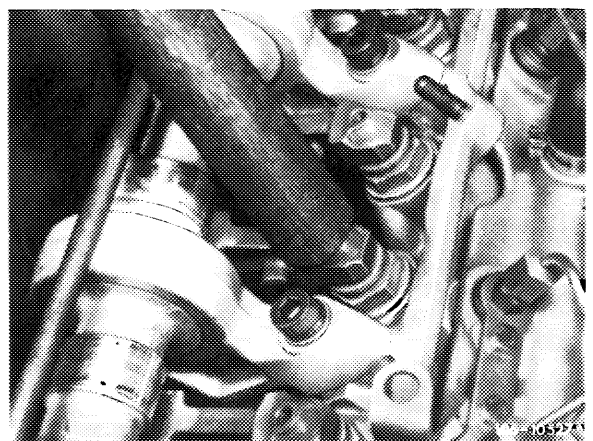


3 Try to move rocker arm manually.

If there is play, check basic position of compensating elements (05–213).

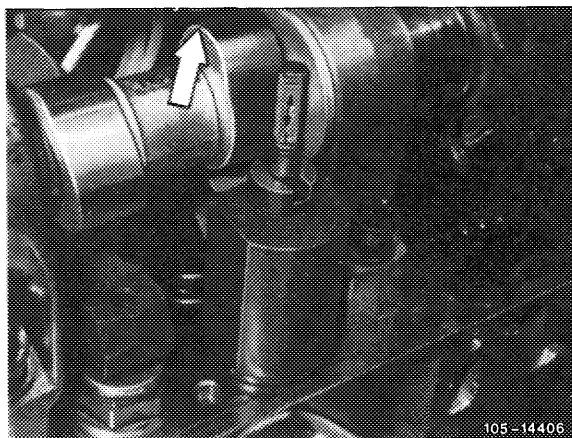

Replacing

4 Remove rocker arm (05–230).

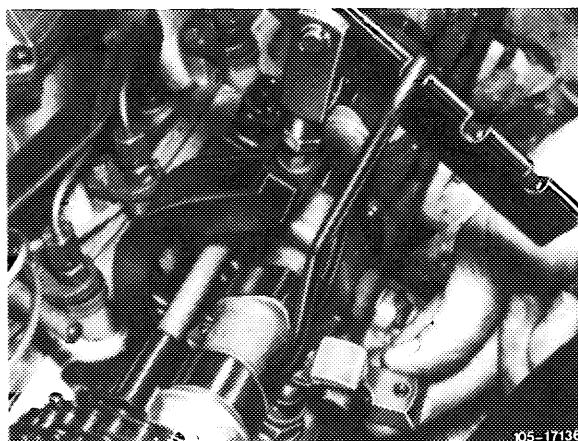

5 Unscrew compensating element with 24 mm socket.

6 Lubricate threads of new compensating element, screw in and tighten to 60 Nm.

7 Install rocker arm (05–230).

8 Check basic position (05–213).

